

Louvre Light in Walnut




DESCRIPTION

The Louvre Light is a solid walnut wall fixture defined by a louvred face that diffuses and softens the light. Mounted upward or downward, it casts a gentle wash across the wall with minimal glare—offering both warmth and subtle definition to a space.

The integrated LED module is dimmable when used with compatible wall dimmers (not supplied), allowing the light level to be tailored to its environment. Supplied with both plug-in and hardwired options, the Louvre Light suits a wide range of interior applications.

Designed by David Caon & Henry Wilson, 2024.

LOUVRE LIGHT, TIMBER.
LKR-LVR-W




MATERIAL	WALNUT
PRODUCT WEIGHT	2.2 LBS / 1.0 KG
DIMENSIONS	87W × 100D × 270H MM / 3.4"× 3.9"D × 10.6"H
LEAD TIME	6-8 WEEKS
LIGHT SOURCE	INTEGRATED OSRAM LED MODULE / 12 W / 12 V DC (AU PLUG-IN DRIVER SUPPLIED)
INPUT VOLTAGE	12 V (VIA DRIVER)
DIMMING	12 V DC CONSTANT-VOLTAGE DRIVER REQUIRED FOR HARDWIRE (PHASE-CUT DIMMABLE)
CERTIFICATIONS	RCM, CE
NOTES	– Timber is natural; grain and colour will vary. – Fixture may be installed upward or downward. – Plug-in or hardwired installation available. Licensed electrician required for hardwire. – Hardwired installation requires a 12 V DC constant-voltage driver, minimum 12 W (Osram or Tridonic recommended).

FINISHES




AMERICAN
WALNUT


TOP VIEW




ISOMETRIC VIEW

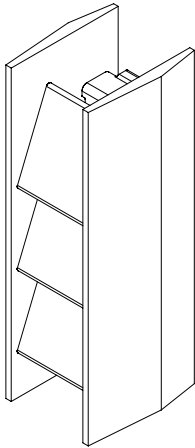

FRONT VIEW

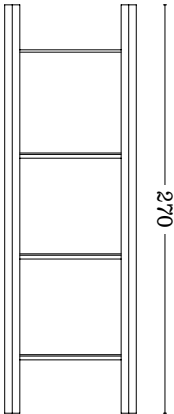

SIDE VIEW

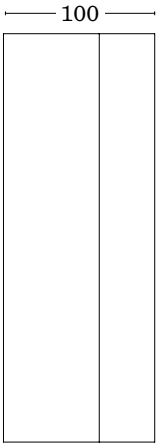

Louvre Light in Aluminium



DESCRIPTION

Cut from aluminium plate and rumble polished, the Louvre Light in aluminium introduces a raw material presence to the series. The louvred face softens and diffuses light across the wall, while the construction highlights exposed precision and the clarity of industrial making. An alternative to the walnut edition, it offers a sharper, more elemental expression of the design.

Designed by David Caon & Henry Wilson, 2025.

LOUVRE LIGHT, ALUMINIUM.
LKR-LVR-A



MATERIALS	ALUMINIUM
PRODUCT WEIGHT	2.2 LBS / 1.0 KG
DIMENSIONS	77W X 100D X 270H MM / 3.4"W X 3.9"D X 10.6"H
LEAD TIME	6-8 WEEKS
LIGHT SOURCE	2X G9 LED / 3W EACH (INLUDED, REPLACEABLE)
INPUT VOLTAGE	220-240 V / 110-120V
DIMMING	TRAILING-EDGE (ELV) WITH DIMMABLE G9
CERTIFICATION	UL, ETL, RCM, CE COMPLIANT COMPONENTS


NOTES	– Hardwired installation only. Licensed electrician required. – Fixture may be mounted upward or downward. – Aluminium is rumble-polished and left raw; tone and markings vary. – Only use LED G9 lamps; halogen not suitable due to heat. – Replacement G9 lamps are available from Laker.
-------	---

FINISHES




ALUMINIUM


TOP VIEW




ISOMETRIC VIEW

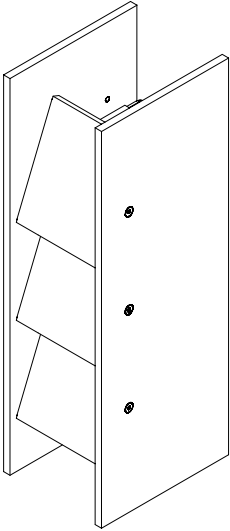

FRONT VIEW

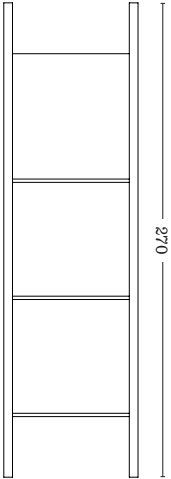

SIDE VIEW

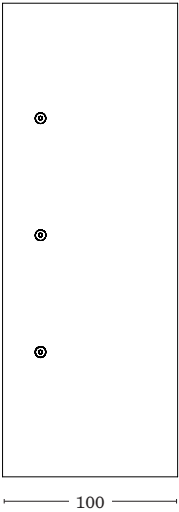

(E. info@laker.studio)
(P. (02) 9199 9658)
(A. 3/82 Myrtle Street, Chippendale NSW 2008)